

# terneo b20



+5...+40 °



|    |       |                               |
|----|-------|-------------------------------|
| /  |       |                               |
| 1  |       | +5...+40 °                    |
| 2  |       | 20                            |
| 3  |       | 4 000                         |
| 4  |       | 220 ±10 %                     |
| 5  |       | 0,29 ±10 %                    |
| 6  |       | 80 × 90 × 54 мм               |
| 7  |       | DS18B20 NTC<br>10 кОм × 25 °С |
| 8  |       | 4                             |
| 9  | - -   | 50 000                        |
| 10 | - -   | 100 000                       |
| 11 |       | 1 °                           |
| 12 | 14254 | IP20                          |



1  
1  
1  
1


5, 6.

6-7.

1 2, (220 ±10 %, 50 )  
(L)  
1, (N) — 2.  
3 4

3000

2

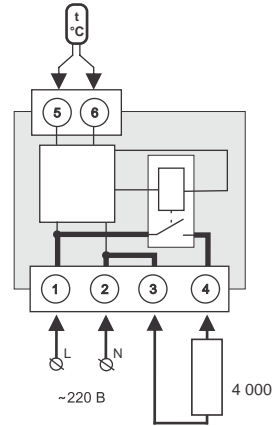

1.



14254 ( )

-5...+45 °

35 (DIN-18) . B

0,5 1,7

( )

20


2

—

—

2,5

3

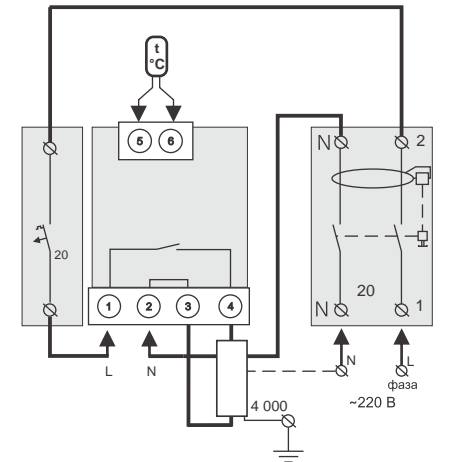

2.

Ø 16 ) ,

5

50


( 20 )

2/3

( 3) ,

2 × 1,0

— 2 × 1,5

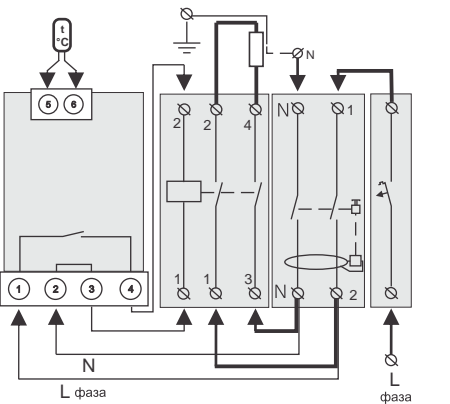

3.

3

(DIN);


.4

2.


3

3

4

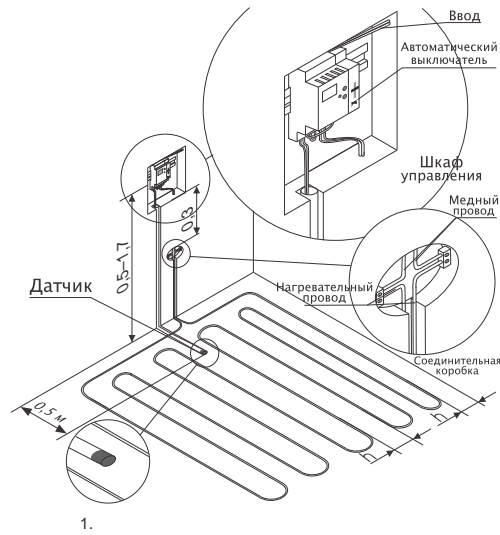

«On» 1 2. 3



«+» «-». (t )



220 ( )

( +45° -5° )

NTCR10 10 × 25°

«+» «-»  
10 90% 50 % (50 )

1. 24 ( )
2. ( )
3. 14 ( )
4. ( )
5. ( )
6. ( )