

terneo b20



+5...+40 °



/		
1		+5...+40 °
2		20
3		4 000
4		220 ±10 %
5		0,29 ±10 %
6		80 × 90 × 54 мм
7		DS18B20 NTC 10 кОм × 25 °С
8		4
9	- -	50 000
10	- -	100 000
11		1 °
12	14254	IP20



1
1
1
1


5, 6.

6-7.

1 2, (220 ±10 %, 50)
(L)
1, (N) — 2.
3 4

3000

2

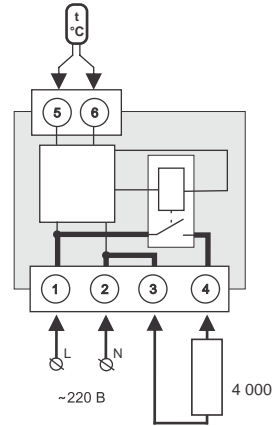

1.



14254 ()

-5...+45 °

35 (DIN-18) . B

0,5 1,7

()

20


2

—

—

2,5

3

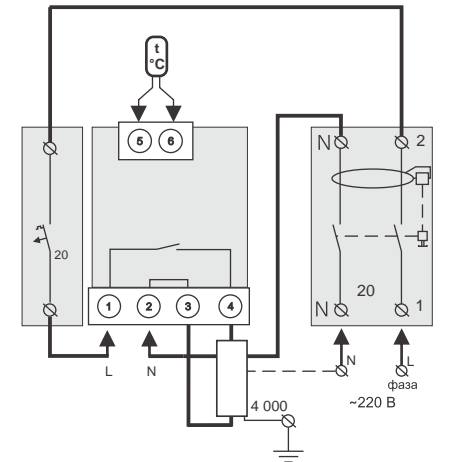

2.

Ø 16) ,
5

50


(20)

2/3

(3) ,

2 × 1,0

— 2 × 1,5

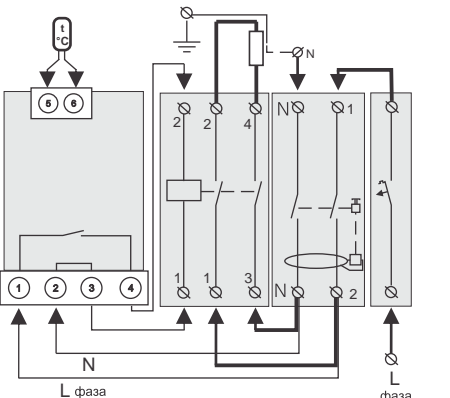

3.

3

(DIN);

.4

2.

()

()

()


()

()


3

3

4

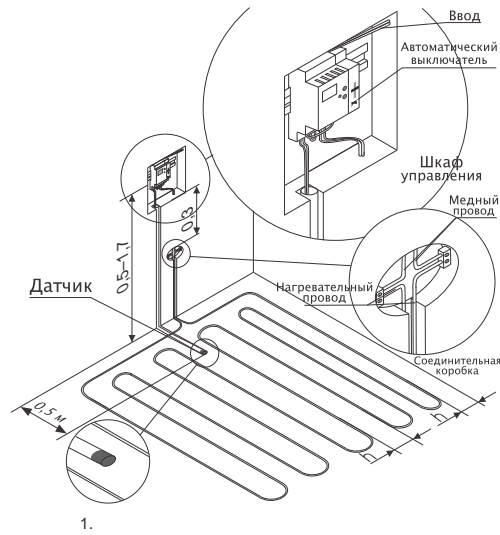

«On» 1 2. 3



«+» «-». (t)



220 ()

(+45° -5°)

NTCR10 10 × 25°

«+» «-»
10 90% 50 % (50)

1. 24 ()
2. ()
3. 14 ()
4. ()
5. ()
6. ()